
Australian Securities Exchange Announcement


7 June 2019**Highlights**

- ❖ Iron oxide (Fe_2O_3) product assaying **67% Fe** with low contaminants.
- ❖ Titanium dioxide (TiO_2) product has assayed 80% TiO_2 at 91% precipitation efficiency prior to further optimisation testwork.

King River Resources Limited (ASX: KRR) is pleased to provide this update on metallurgical precipitation testwork from the company's 100% owned Speewah Specialty Metals ("SSM") Project in the East Kimberley of Western Australia. KRR is investigating both vat leach of lump material and agitated tank leach of concentrates using sulphuric acid. Scoping level capex and opex costings have supported the agitated tank concentrate leach option as the preferred process route to produce vanadium pentoxide (V_2O_5), titanium dioxide (TiO_2) and iron oxide (Fe_2O_3) products (refer KRR ASX releases 21 and 22 March and 2 April 2019). In addition, KRR has targeted other high value specialty commodities such as high purity alumina ("HPA"), magnesium oxide and vanadyl sulphate. A Prefeasibility Study (PFS) is underway and is examining several process routes to extract these commodities.

Metallurgical refining testwork has initially focused on precipitating Fe, Al and Ti products from the sulphuric acid leach solutions as these metals occur in the highest concentrations.

The iron oxide (Fe_2O_3) chemical precipitation tests have used a sulphuric acid leach solution from the 5.6mm lump agitated vat leach and column leach tests completed by Nagrom (refer KRR ASX announcements 18 January 2019 and 1 March 2019). These leach solutions contained 32-35g/L Fe. The iron reduction method was used to initially precipitate a hydrated ferrous sulphate from the leachate at 81-82% precipitation efficiencies. The hydrated ferrous sulphate was washed to help remove entrained contaminants including V and Ti. The final precipitate was dried and staged calcined up to 1000°C to produce an iron oxide (Fe_2O_3) product that assayed 67.13% Fe, with 1.91% Mg, 0.21% Al, 0.096% Mn, 0.09% Si, 0.081% Ti, 0.031% S, 0.028% Na, 0.02% V, 0.01% Ca and 0.008% K.

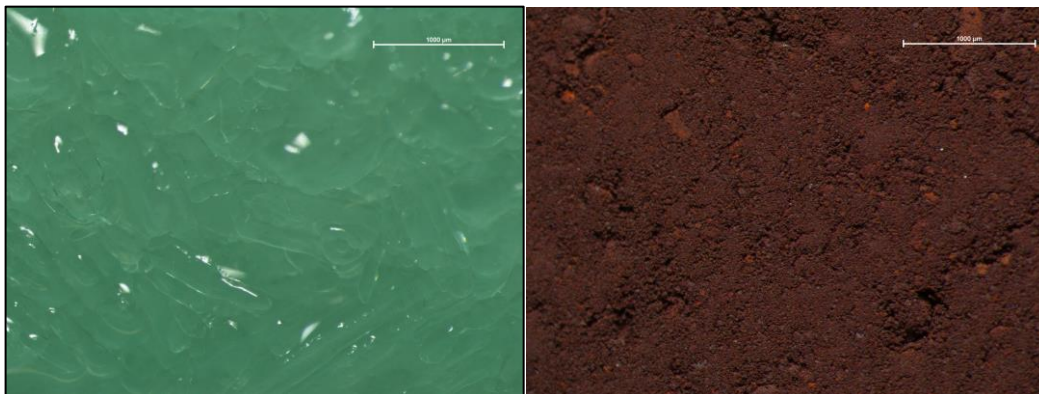

Washed hydrated ferrous sulphate

Calcined iron oxide

Further iron reduction, purification and other methods of producing Fe_2O_3 are under investigation to develop the best Fe_2O_3 process route and maximise acid recycle or regeneration for the SSM project.

The titanium dioxide (TiO₂) chemical precipitation tests have used the sulphuric acid leach solution from the 5.6mm lump column leach tests after iron reduction and precipitation of ferrous sulphate. These leach solutions contained 3.4-3.9g/L Ti. The hydrolysis method has been used successfully to precipitate titanium dioxide from the leachate at 87-92% precipitation efficiencies. The best intermediate TiO₂ product result with the lowest contaminants assayed 80% TiO₂, with 1.39% Fe, 2.84% S, 0.016% Mg, 0.15% Al, 0.011% V, 0.007% Mn, 0.05% Na, 0.007% Ca, 0.017% K, 0.065% Si and 12.94% LOI, at 91% precipitation efficiency. A larger mass of this intermediate product is being produced so various purification methods can be applied to improve the final grade.

Further hydrolysis and other methods of producing TiO₂ are under investigation to produce 98% and high purity 99.5% TiO₂ products and develop the best process route for the SSM project.

Directors Comments

The Board continues to be most encouraged by this ongoing testwork, and in particular these excellent initial precipitation efficiencies of iron oxide and titanium dioxide products from a pregnant sulphuric acid leach solution.

These ongoing tests of a range of different extraction methods will enable King River Resources to identify the optimal process route to produce high grade, high value vanadium pentoxide, titanium dioxide, iron oxide and alumina products to be incorporated into a Prefeasibility Study for later in 2019.

Anthony Barton

Chairman

King River Resources Limited

Statement by Competent Person

The information in this report that relates to Exploration Results, Mineral Resources, Metallurgy and Previous Studies is based on information compiled by Ken Rogers (BSc Hons) and fairly represents this information. Mr. Rogers is the Chief Geologist and an employee of King River Resources Ltd, and a Member of both the Australian Institute of Geoscientists (AIG) and The Institute of Materials Minerals and Mining (IMMM), and a Chartered Engineer of the IMMM. Mr. Rogers has sufficient experience of relevance to the styles of mineralisation and the types of deposits under consideration, and to the activities undertaken, to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Rogers consents to the inclusion in this report of the matters based on information in the form and context in which it appears.

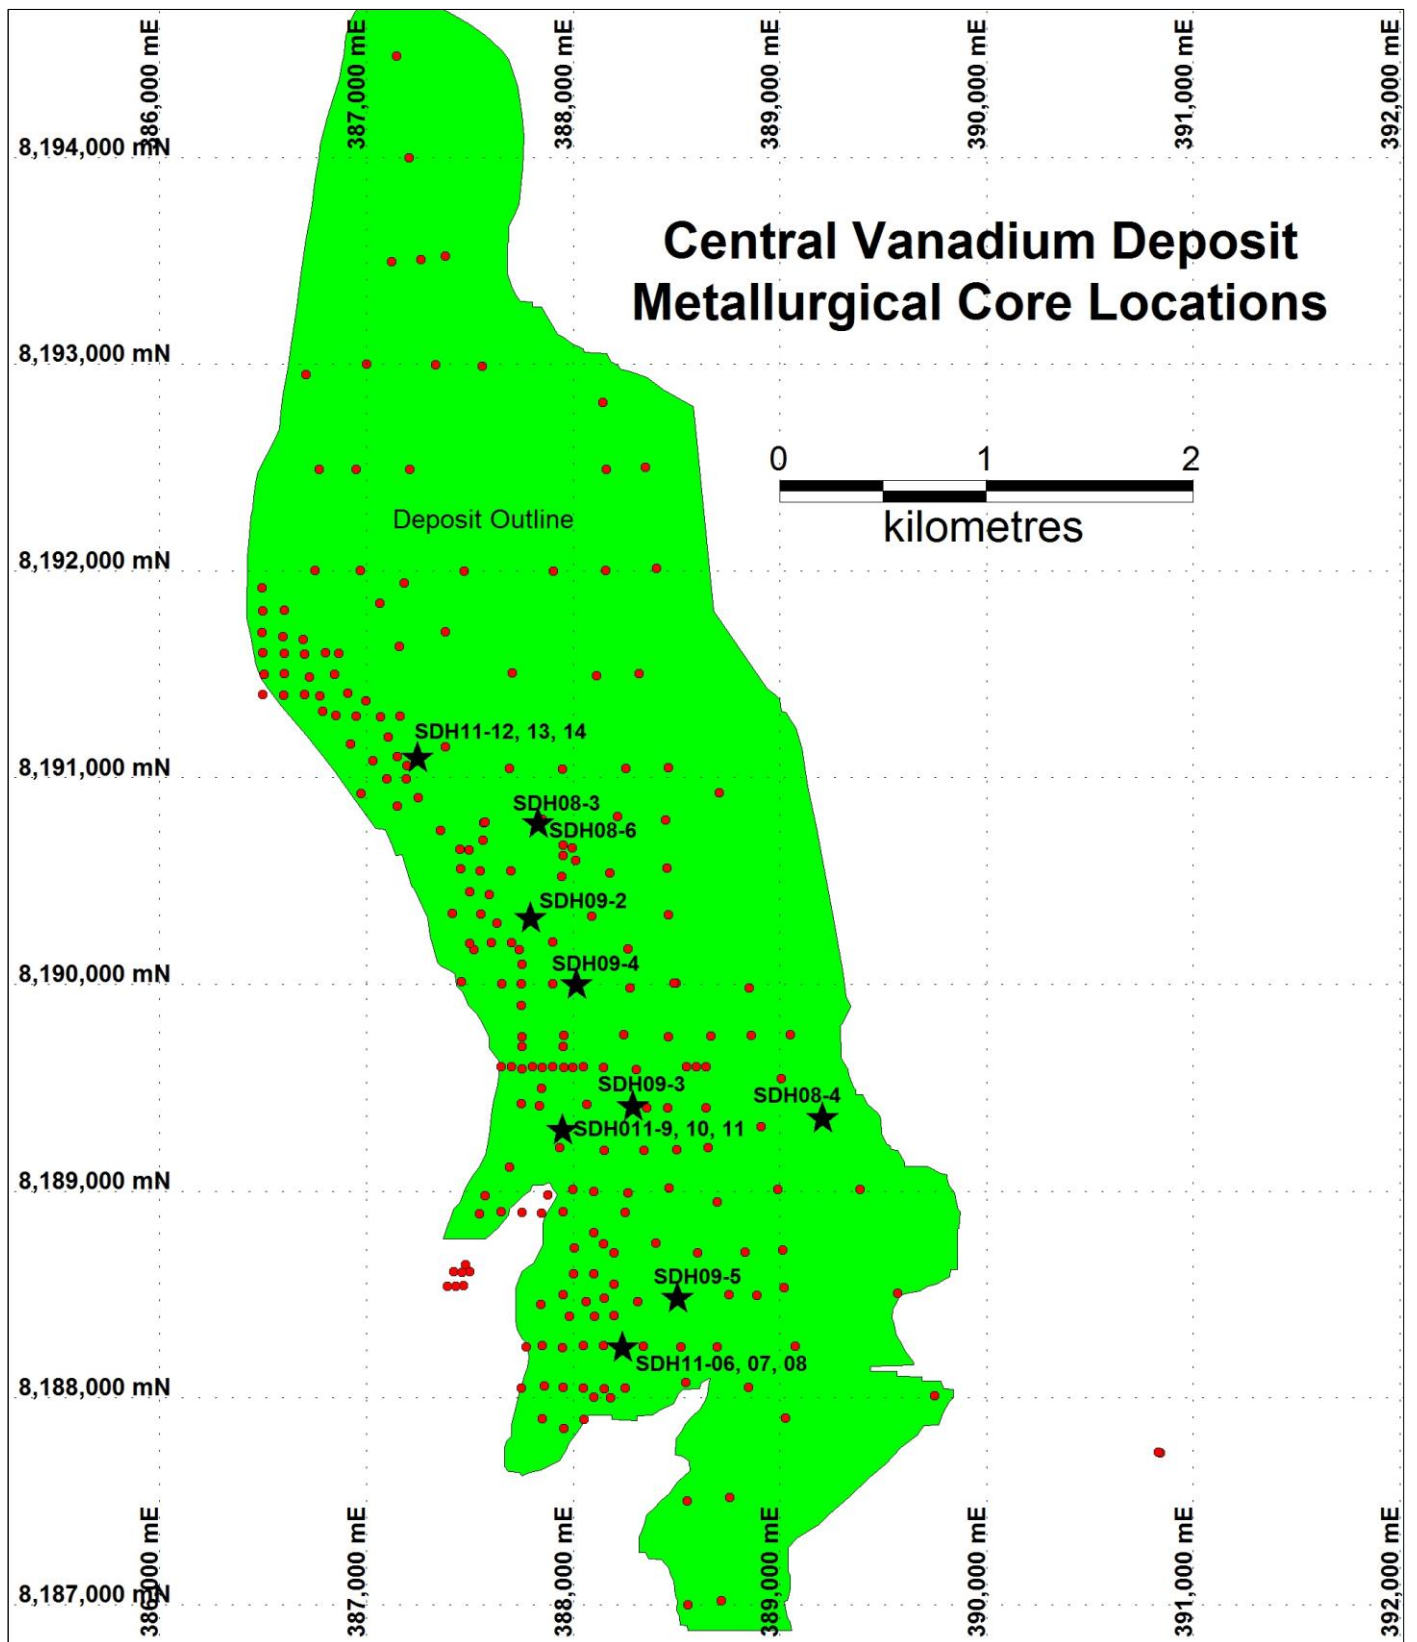


Figure 1: Diamond core hole locations (black stars) and Reverse Circulation drill holes (red dots) within the Central Vanadium Deposit, including metallurgical core holes SDH08-06 and SDH11-09 referred to in this announcement. Diamond core hole collar data is given in Table 1.

Table 1: Diamond core holes drilled in the Central deposit

Hole_id	Deposit	East_GDA	North_GDA	RL	Depth	Dip	Azimuth	Tenement
		m	m	m	m	degrees	degrees	
SDH08-3	Central	387830.42	8190778.6	197.037	80	-90	0	E80/2863
SDH08-4	Central	389203.71	8189358.8	190.014	75	-90	0	E80/2863
SDH08-6	Central	387831.84	8190783.9	197.187	450.5	-90	0	E80/2863
SDH09-2	Central	387793.53	8190327.7	196.267	50	-90	0	E80/2863
SDH09-3	Central	388287.08	8189417.5	189.987	70.5	-90	0	E80/2863
SDH09-4	Central	388016.74	8190007.5	194.698	42.1	-90	0	E80/2863
SDH09-5	Central	388502.3	8188487.8	186.4	57.1	-90	0	E80/2863
SDH11-06	Central	388234.08	8188240.6	188.018	39.4	-90	0	E80/2863
SDH11-07	Central	388234.04	8188243.7	187.999	41.6	-90	0	E80/2863
SDH11-08	Central	388234.08	8188246.9	187.941	40.9	-90	0	E80/2863
SDH11-09	Central	387946.28	8189294	191.676	40.9	-90	0	E80/2863
SDH11-10	Central	387945.75	8189295.9	191.643	39.4	-90	0	E80/2863
SDH11-11	Central	387945.33	8189297.8	191.706	40.9	-90	0	E80/2863
SDH11-12	Central	387243.47	8191101.7	212.529	41	-90	0	E80/2863
SDH11-13	Central	387242.63	8191101.2	212.467	41	-90	0	E80/2863
SDH11-14	Central	387241.65	8191100.6	212.457	40.1	-90	0	E80/2863

Appendix 1: King River Resources Limited Speewah Project JORC 2012 Table 1

SECTION 1 : SAMPLING TECHNIQUES AND DATA

Criteria	JORC Code explanation	Commentary
Sampling Techniques	<p><i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></p> <p><i>In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems.</i></p> <p><i>Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i></p>	<p>This ASX Release dated 7 June 2019 reports on iron oxide (Fe₂O₃) and titanium dioxide (TiO₂) precipitation testwork from 5.6mm lump agitated vat leach and 5.6mm lump flooded column leach liquors from the high grade zone of the Central Vanadium deposit at KRR's Speewah Project.</p> <p><i>Diamond Core Sample</i> 16 HQ and PQ diamond drill (DD) core holes were drilled in the Central Vanadium deposit (see Figure 1 and Table 1 for locations). One of the PQ core holes from the high grade zone (SDH11-09 - 21-37.5m) has been used in the hydrometallurgical metallurgical tests reported in this announcement. Nagrom received a 60kg composite magnetite gabbro sample of PQ ¼ core from the high grade zone of drillhole SDH11-09 – 21-37.5m downhole. The head grade of this sample is 0.36% V₂O₅, 3.65% TiO₂, 21.37% Fe₂O₃, 12.74% Al₂O₃, 8.36% CaO, 4.33% MgO and 44.75% SiO₂ (KRR ASX 1 March 2019).</p> <p><i>Metallurgical Flooded Column and Vat Samples</i> Nagrom completed a flooded column test using 4468.8g subsample of a 60kg composite sample of ¼ core from the high grade zone interval of diamond core hole SDH11-09 21-37.5m, crushed to lump size of 5.6mm. The column internal diameter is 80mm. The column test used 4468.8g of 5.6mm lump material leached in 20% H₂SO₄ (maintained at 150-200g/L free acid during leach) at 70°C temperature, at 20% pulp density and upward flow rate of 37.4L/min/m². The results of this test we reported in KRR ASX announcement 1 March 2019.</p> <p>Nagrom completed a diagnostic agitated vat leach test used a subsample of a 60kg composite sample of ¼ core from the high grade zone interval of diamond core hole SDH11-09 21-37.5m, crushed to lump size of 5.6mm. The vat test used 1000g of 5.6mm lump material leached in 20% H₂SO₄ (maintained at 150-200g/L free acid during leach) at 70°C temperature, at 20% pulp density, with flow maintained by an impellor in the leach liquor above the sample bed. The results of this test we reported in KRR ASX announcement 18 January 2019.</p>
Drilling techniques	<p><i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i></p>	<p>Diamond (NQ and HQ3 size) drilling was completed to support the preparation of the Mineral Resource estimate. Holes drilled vertical.</p> <p>Metallurgical testwork was completed on ¼ PQ core composite sample from one metallurgical diamond drill core hole (Figure 1 and Table 1):</p> <ul style="list-style-type: none"> SDH11-09 21-37.5m (High Grade Zone).
Drill sample recovery	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p>	<p>No qualitative recovery data was recorded. Qualitative examination and photography suggested RC and diamond recoveries are very high. Good ground conditions exist which suggests recovery is likely to be very high.</p>
	<p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p>	<p>PQ drilling was used to maximise diamond sample recovery.</p>

	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	No relationship between grade and recovery has been identified.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	DD core and RC chips were geologically logged, with descriptions of mineralogy and lithology noted.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i>	Logging was generally qualitative in nature. DD core photographed wet.
	<i>The total length and percentage of the relevant intersections logged.</i>	SDH11-09 – 0-40.9m, 100% logged.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	DD core was cut in half with a core saw. Some half sections sawn in quarters. ¼ core used in testwork.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i>	Not applicable as samples used in the reported testwork were DD core.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	Whole continuous lengths of DD ¼ core samples collected, composited and used in testwork. These were collected to represent the composite intervals of both the High Grade and Low Grade Zones.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	Subsampling is performed during the preparation stage according to the metallurgical laboratories' internal protocol.
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	Use of DD core in metallurgical testwork gives a continuous insitu sample. PQ ensures high recovery rates. DD core twinned previous RC drill holes. Whole sample interval used in testwork.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	Sample sizes are considered appropriate to the grain size of the material being sampled.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	<p>TSW Analytical Testwork</p> <p>Testwork includes hydrogen chloride (HCl) gas sparging of sulphuric acid leachate solutions, precipitation of aluminium chloride hexahydrate (ACH), calcination of ACH, and washing. Assays are conducted on leach solutions and solid residues.</p> <p>TSW Analytical is a well-established analytical service provider that has developed a reputation for producing accurate analyses for complex samples. The company's expertise has assisted with the development of hydrometallurgical flow-sheets for multi-element ore concentrates.</p> <p>The titaniferous vanadiferous magnetite concentrate (supplied by the client) and leach residues have been assayed using ICP-AES and ICP-MS. Samples were fused in a lithium borate flux, the resultant glass bead was dissolved in hydrochloric acid and suitably diluted for either ICP-MS or ICP-AES analysis. Loss on Ignition (LOI) at 1000 °C was performed for completeness of the analytical data and to give a better indication of the total analytical percentage approximation to 100%.</p> <p>The leach solutions and wash liquors have been analysed using ICP-AES and ICP-MS. The samples were diluted suitably for the appropriate ICP based analysis. Dilutions are used to bring the analyte concentration into the optimum analytical range of the ICP instrument used and to reduce matrix interference complications during quantification.</p> <p>Precipitation efficiency has been determined using the mass of the total analyte in the leach residue divided by the mass of the total analyte in the initial leach solution used. The resulting fraction is multiplied by 100 to give a percent precipitation efficiency.</p>

		<p>TSW Analytical uses in-house standards and Certified Reference Materials (CRMs) to ensure data are "Fit-For-Purpose".</p> <p>Nagrom Testwork All solid samples have been analysed via XRF. The prepared sample is fused in a lithium borate flux with a lithium nitrate additive. The resultant glass bead is analysed by XRF. Loss on Ignition (LOI) is also conducted to allow for the determination of oxide totals.</p>
	<p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p>	No geophysical data was collected.
	<p><i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></p>	<p>TSW Analytical TSW reports concentrations as micrograms per gram ($\mu\text{g/g}$) in the solid (unless otherwise stated). Instrumental response is measured against AccuTrace High Purity multi-element standards (Choice Analytical) to achieve quantitation. Data are subjected to in-house QA and QC procedures where an independent analyst recalculates instrumental output and compares the newly generated data set with the original. Lack of equivalence between the two data sets triggers an internal review and if necessary re-analysis of the entire data set. Under these circumstances a third independent analyst will assess all generated data prior to sign off. Initial equivalence between the two data sets, generated by the analyst and reviewer, will clear data for remittance to the customer. All reports are reviewed by an independent analyst prior to submission to the customer and where necessary relevant changes, such as wording that may give rise to possible ambiguity of interpretation, will be modified prior to the final report being sent to the customer.</p> <p>Nagrom is certified to a minimum of ISO 9001:2015.</p>
Verification of sampling and assaying	<p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p>	Significant intersections have been verified by alternative company personnel.
	<p><i>The use of twinned holes.</i></p>	All metallurgical DD core holes twinned previous RC holes. SDH11-09 has been twinned by SDH11-10 and SDH11-11 (see Figure 1 and Table 1) which is being used in current metallurgical testwork.
	<p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></p>	Templates have been set up to facilitate geological logging. Prior to the import into the central database, logging data is validated for conformity and overall systematic compliance by the geologist. Assay results are received from the laboratory in digital format. Assays, survey data and geological logs incorporated into a database.
	<p><i>Discuss any adjustment to assay data.</i></p>	No adjustments or calibrations will be made to any primary assay data collected for the purpose of reporting assay grades and mineralised intervals.
Location of data points	<p><i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></p>	Almost 90% of the collars used in the resource estimate have been surveyed using a differential global positioning system (DGPS) instrument, with the remaining surveyed using a hand-held GPS. Downhole deviations have been measured by downhole survey instruments on 3 holes only using a Globaltech Pathfinder digital downhole camera. All but four holes are vertical. All metallurgical holes are vertical. The vertical and shallow nature of the drilling

		means that the absence of downhole surveys is not considered a material risk.
	<i>Specification of the grid system used.</i>	The adopted grid system is GDA 94 Zone 52.
	<i>Quality and adequacy of topographic control.</i>	A topographic file provided by KRR was calibrated for use in the Mineral Resource estimate using DGPS and GPS collar data. The Competent Person considers that the topography file is accurate given the use of DGPS data in the Mineral Resource area.
<i>Data spacing and distribution</i>	<i>Data spacing for reporting of Exploration Results.</i>	RC drill spacing is mostly 250 m by 250 m at the Central deposit, closing down to 100 m by 100 m in the western area (see Figure 1). Metallurgical DD core holes are spaced about 500 m apart (see Figure 1).
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	The Competent Person believes the mineralised domains have sufficient geological and grade continuity to support the classification applied to the Mineral Resources given the current drill pattern.
	<i>Whether sample compositing has been applied.</i>	Metallurgical samples were composited to represent the High Grade and Low Grade Zones within the magnetite gabbro and within the resource envelope. This was considered appropriate given the metallurgical testwork was designed to test the lower and high grade zones of the mineralisation and it provided for a bulk sample suitable for the testwork.
<i>Orientation of data in relation to geological structure</i>	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	All metallurgical DD core holes are vertical. This allows the holes to intersect the mineralisation at a high-angle as the magnetite gabbro has a very shallow dip to the east.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	The relationship between the drilling orientation and the orientation of key mineralised structures is not considered to have introduced a sampling bias.
<i>Sample security</i>	<i>The measures taken to ensure sample security.</i>	Chain of Custody is managed by the Company until samples pass to a duly certified metallurgical laboratory for subsampling, assaying, beneficiation and hydrometallurgical test work. The RC assay pulp bags are stored on secure sites and delivered to the metallurgical laboratory by the Company or a competent agent. The chain of custody passes upon delivery of the samples to the metallurgical laboratory.
<i>Audits or Reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	No external audits have been completed.

SECTION 2 : REPORTING OF EXPLORATION RESULTS

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<p><i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></p> <p><i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></p>	<p>The Speewah Project comprises 12 Exploration Licences, three Mining Leases and two Miscellaneous Licences. Details are listed in Table 1 Schedule of Tenements held at 31 March 2019 reported previously in the March 2019 Quarterly Report. The Speewah testwork reported in this announcement are from samples collected entirely within E80/2863. The tenements are 100% owned by Speewah Mining Pty Ltd (a wholly owned subsidiary of King River Resources Limited), located over the Speewah Dome, 100km SW of Kununurra in the East Kimberley. The tenements are in good standing and no known impediments exist. No Native Title Claim covers the areas sampled and drilled. The northern part of the tenements (but not E80/2863) is in the Kimberley Heritage Area.</p>
<i>Exploration done by other parties</i>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	No exploration completed by other parties is relevant for the metallurgical testwork reported herein.
<i>Geology</i>	<i>Deposit type, geological setting and style of mineralisation.</i>	<p>The ferrovanadium titanium (Ti-V-Fe) deposits represent part of a large layered intrusion (the Hart Dolerite), which was intruded c1790 Ma into the Palaeo-Proterozoic sediments and minor volcanics of the 1814 Ma Speewah Group in the East Kimberley Region of Western Australia.</p> <p>The deposits occur within the Speewah Dome, which is an elongated antiform trending N-S. The dome is about 30 km long and attains a maximum width of about 15 km. The Hart Dolerite sill forms the core of the dome.</p> <p>Since the deposit discovery in 2006, at least two distinct types of felsic granophyres and three mafic gabbros have been identified in the Hart Dolerite as follows:</p> <ul style="list-style-type: none"> • K felsic granophyre (youngest) • Mafic granophyre • Pegmatoidal gabbro • Magnetite gabbro (host unit) • Felsic gabbro (oldest). <p>The vanadium-titanium mineralisation is hosted within a magnetite bearing gabbro unit of the Hart Dolerite, outcropping in places and forming a generally flat dipping body that extends over several kilometres of strike and width. The layered sill is up to 400m thick containing the magnetite gabbro unit which is up to 80m thick.</p> <p>Given the mode of formation, mineralisation displays excellent geological and grade continuity which was considered when classifying the Mineral Resource estimate. Exposure is limited and fresh rock either outcrops or is at a shallow depth of a few metres.</p> <p>Ti-V-Fe mineralisation occurs as disseminations of vanadiferous titanomagnetite and ilmenite.</p> <p>Within the tenements the vanadium deposits have been divided into three deposits – Central, Buckman and Red Hill. The test work reported in this announcement was sampled from the Central vanadium deposit (Figure 1).</p>

Criteria	JORC Code explanation	Commentary
Drill hole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> ○ easting and northing of the drill hole collar ○ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar ○ dip and azimuth of the hole ○ down hole length and interception depth ○ hole length. ○ If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<p>New exploration results are not being reported. Locations of diamond (DD) core holes, including metallurgical core holes used in this announcement, are shown on Figure 1 and Table 1.</p>
Data aggregation methods	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</p>	<p>Exploration results are not being reported.</p>
	<p>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p>	<p>Continuous lengths of ¼ core composited for metallurgical samples from the Low Grade and High Grade Zones.</p>
	<p>The assumptions used for any reporting of metal equivalent values should be clearly stated.</p>	<p>No metal equivalent values are used for reporting.</p>
Relationship between mineralisation widths and intercept lengths	<p>These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</p>	<p>Due to the very shallow dip of the mineralisation, the vertical metallurgical DD core holes represent almost the true width of the mineralisation.</p>
Diagrams	<p>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</p>	<p>Figure 1 shows the location of diamond core holes within the Central Vanadium deposit referred to in this announcement.</p>
Balanced reporting	<p>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</p>	<p>Reports on previous metallurgical results can be found in ASX Releases that are available on our website, including announcements 1 April 2010, 15 July 2010, 9 November 2010, 8 February 2012, 21 April 2017, 21 August 2017, 9 October 2017, 4 December 2017, 30 January 2018, 27 February 2018, 21 March 2018, 25 June 2018, 23 July 2018, 15 October 2018, 19 November 2018, 18 January 2019, 1 March 2019 and 9 May 2019.</p>
Other substantive exploration	<p>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical</p>	<p>Updated vanadium resource estimates in accordance with the JORC 2012 guidelines were reported in KRR ASX announcement 26 May 2017 and 1 April 2019.</p>

Criteria	JORC Code explanation	Commentary
<i>data</i>	<i>and rock characteristics; potential deleterious or contaminating substances.</i>	
<i>Further work</i>	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Further metallurgical tests are planned to increase metal recoveries, shorten leach times and reduce acid consumption, and trialing selective chemical precipitation, thermal hydrolysis, ion exchange and solvent extraction methods to precipitate vanadium pentoxide and titanium dioxide, and make vanadium electrolyte and high purity alumina (HPA).